

# PhoXi 3D Scanner XL



## Datasheet

Parameter	Value
3D Sensing Technology	Structured Light
Output data	3D points (x y z) Normals (x y z) Depth Map (z) Texture (grayscale intensity) Confidence
Resolution	Up to 3.2 Million 3D Points 2064 x 1544
Scanning range	1680 - 3780 mm
Optimal scanning distance (sweet spot)	2326 mm
Scanning area (at the sweet spot)	1954 x 1459 mm
Point-to-point distance (at the sweet spot)	0.947 mm
Calibration accuracy (1 $\sigma$ )	0.500 mm
Temporal noise (1 $\sigma$ )	0.400 mm
Scanning time	250 - 3000 ms
Dimensions	953 x 68 x 86 mm
Baseline	850.0 mm
Weight	1200 g
Temperature working range	Full: 0 - 40 degrees Optimal: 22 - 25 degrees
Power	PoE or 24V
Processing unit	NVIDIA Pascal™ Architecture GPU with 256 CUDA cores
Data connection	1 Gbit Ethernet


These parameters are valid at 22 °C - 25 °C at focus distance for white objects with 80% albedo.

For operation and installation instructions, please refer to the User Manual and CAD models available at: <https://photoneo.com/kb/device-resources>



# PhoXi 3D Scanner XL

## Datasheet

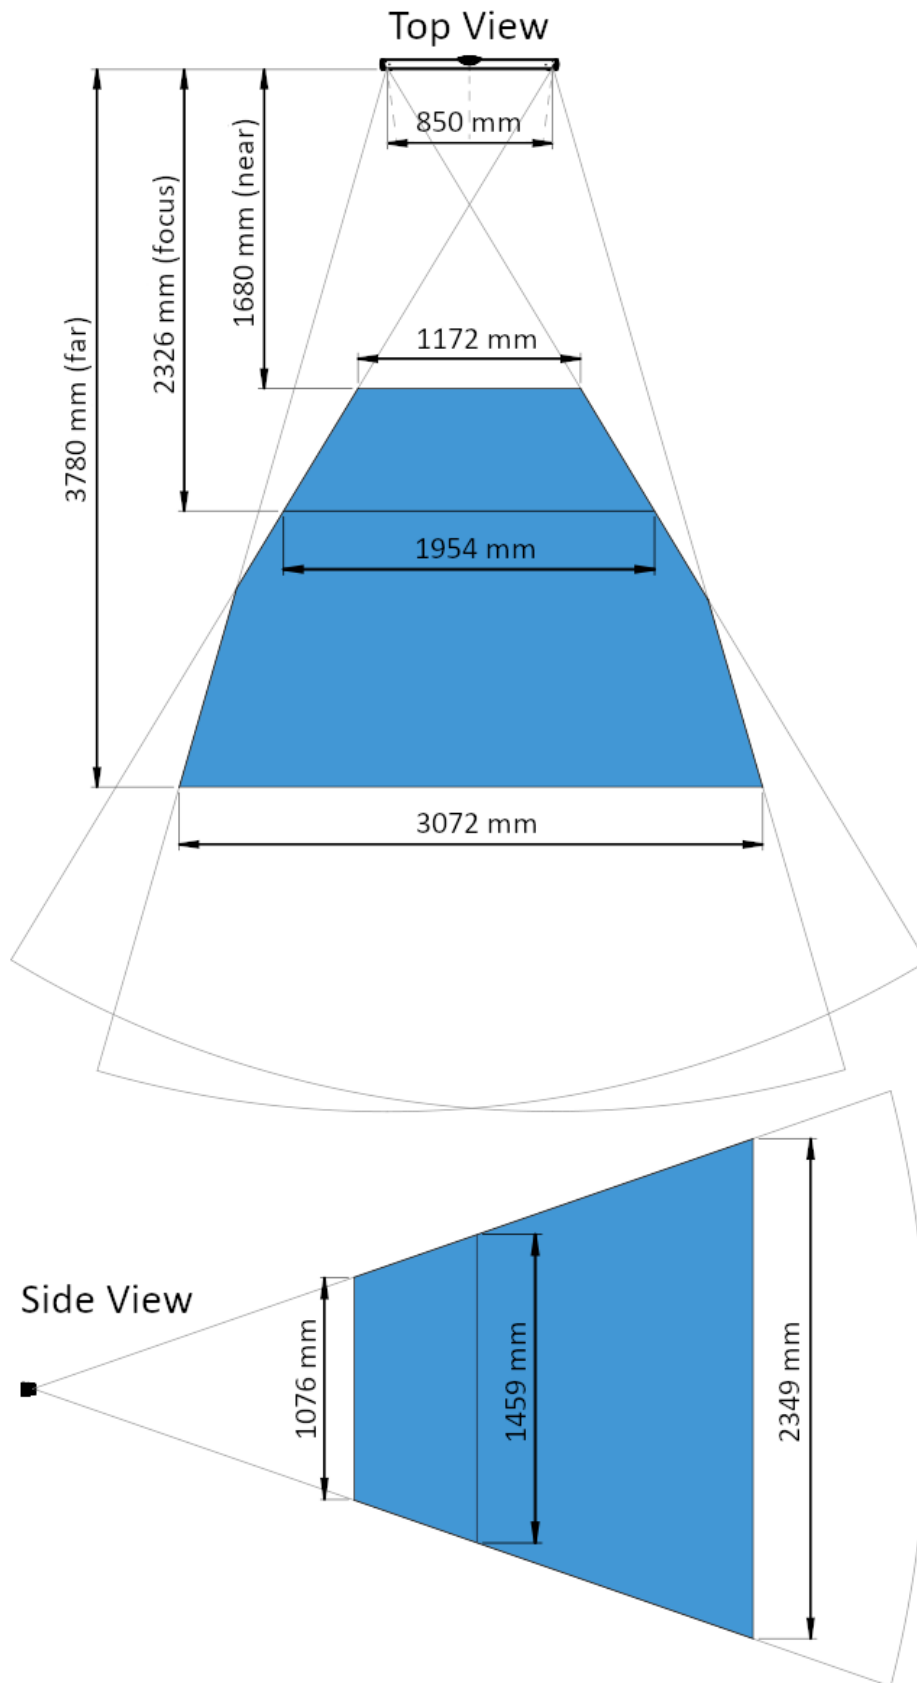

Web: [www.photoneo.com](http://www.photoneo.com)  
 Business Inquiries: [sales@photoneo.com](mailto:sales@photoneo.com)  
 Support: [Help Center](#)

Photoneo s.r.o.  
 Plynárska 6  
 82109 Bratislava,  
 Slovakia