


ULTRA-COMPACT, LWIR
THERMAL IMAGING CORE



Dione 1280 OEM Series

Ultra-compact, long-wave (LWIR) thermal imaging core

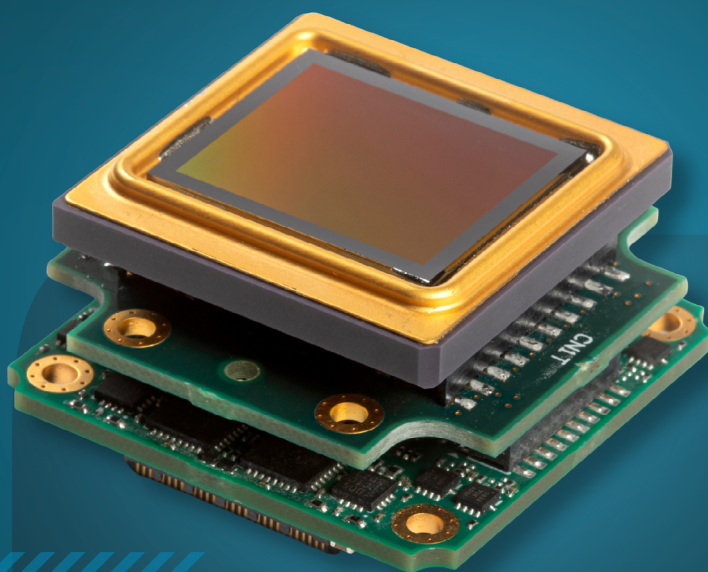

STATE-OF-THE-ART THERMAL IMAGING CORE

KEY FEATURES


- ◆ Ultra-compact size, low weight and power (SWaP)
- ◆ 1280x1024 microbolometer detector with 12 μm pixel pitch
- ◆ Frame rates up to 60 Hz
- ◆ Detector NETD is less than 40 mK (available upon request) or 50 mK
- ◆ Uncooled and shutterless
- ◆ Suitable for use in border security, thermal security and vision enhancement applications

The Dione 1280 OEM series is based on an uncooled microbolometer detector with a 1280x1024 pixel resolution and 12 μm pixel pitch.

The Dione 1280 OEM benefits from Xenics image enhancement for advanced image processing while keeping power consumption low. Moreover, GenCam compliance and availability of multiple lenses adds flexibility for integration programs in the target markets like safety and security, transportation and industrial process monitoring.

Dione 1280 OEM Series

EU based supplier

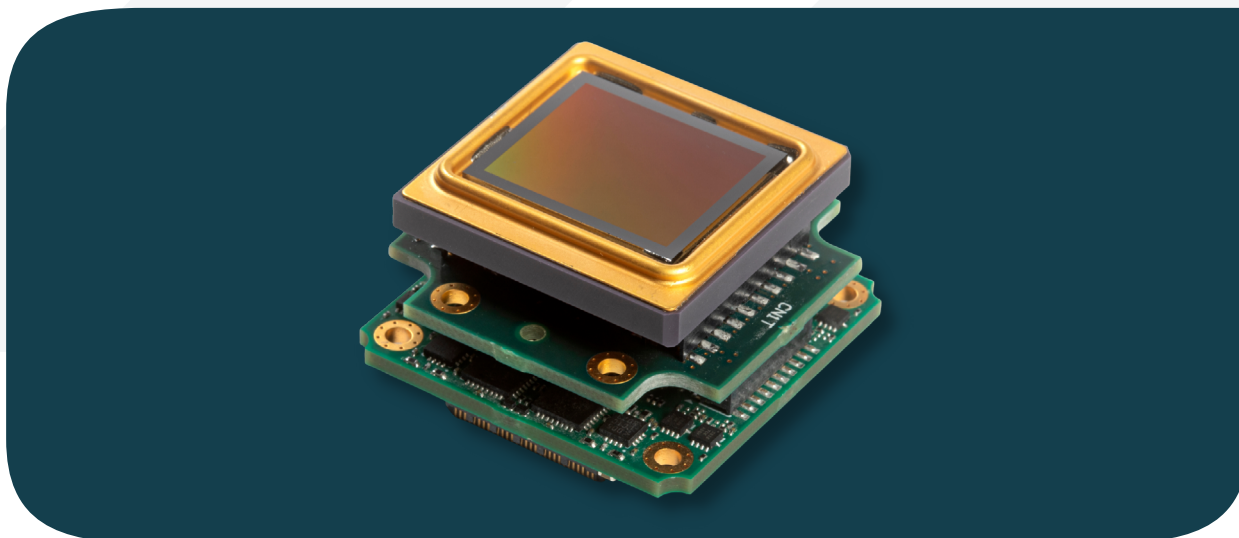

KEY PERFORMANCES

Image format/Pixel pitch	1280 x 1024 pixels / 12 μ m
Integration type	Rolling shutter
Spectral range	8 - 14 μ m
Max frame rate (full frame)	60 Hz (16bit DV, MIPI CSI-2); 40 Hz (USB)
Power consumption	2.1 W (16bit DV); < 2.7 W (MIPI CSI-2, USB)
Power supply voltage	DC 5 V

FUNCTIONS & INTERFACES

Digital output format	16bit DV, MIPI CSI-2, USB
Operating temperature range (housing temperature)	From -40°C to +70°C (16bit DV, USB); From -30°C to +70°C (MIPI CSI-2)
Storage temperature	From -40°C to +85°C (16bit DV, USB); From -30°C to +85°C (MIPI CSI-2)
Detector NETD	<40 mK (available upon request) or <50 mK
Shock / Vibration	40 g, 11 ms, MIL-STD810G / 5 g (20 to 2000 Hz), MIL-STD810G

PRODUCT SELECTOR GUIDE

XEN-000692 (Dione 1280 OEM 40 mK)	XEN-000691 (Dione 1280 OEM 50 mK)
-----------------------------------	-----------------------------------

sales@xenics.com



xenics.com

Xenics
Photonis Group

© Xenics. XDS024. The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by Xenics for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should verify that they have the most current Xenics product information before placing orders. No claims or warranties are made as to the application of Xenics products. Texts and pictures may not be considered as contractually binding. This document may not be reproduced, in whole or in part, without the prior written consent of Xenics.