

COSMOS-6k LARGE AREA CMOS CAMERA

KEY FEATURES

- Large 6.5k x 6.5k pixel sensor
- > 90% QE
- 10 μm pixel size
- < 1 e^- read noise
- 22 fps at full resolution
- Sensor temperature < -25°C
- Dark current < 0.05 $\text{e}^-/\text{p/s}$
- 101 dB dynamic range
- Rolling and true global shutter
- Hardware, electronics, sensor and software developed by Teledyne

TYPICAL APPLICATIONS

- Ground-based astronomy
- Exoplanet characterization
- Orbital object tracking
- Near Earth Object characterization
- Time Domain Astronomy
- Solar Physics
- Adaptive optics
- Speckle/Lucky Imaging

RELIABILITY

- High reliability, industry-leading Citadel chamber design

Next-Generation, Large Sensor, High-Performance Camera for Astronomy

Teledyne Princeton Instruments COSMOS camera merges CCD and CMOS performance, resulting in a new generation of camera distinct from anything else currently on the market. The COSMOS camera excels in several key areas: resolution, pixel size, sensitivity, and speed. Notably, it is the only large format, high performance CMOS camera designed and manufactured entirely within a single source, at Teledyne.


Teledyne Imaging has a history of providing solutions for world-changing projects, including the Mars Rover missions, ground-based observatories, and the James Webb Space Telescope. The COSMOS camera, leveraging its large area CMOS technology, stands as the ultimate solution for astronomy and more.



COSMOS-6k SPECIFICATIONS

SPECIFICATIONS	Camera Performance
Sensor	Back illuminated, grade 1, 100% fill factor
Active Array Size	6504 x 6504 (42 megapixels)
Pixel Area	10 x 10 μm (100 μm^2)
Sensor Area	65 x 65 mm (92 mm diagonal)
Peak QE%	> 90% peak QE
Spectral Response	200 – 1100 nm
Full Well Capacity	~ 14ke ⁻ (typical, high gain), ~ 100ke ⁻ (typical, low gain)
Read Noise	< 1.5 e ⁻ RMS (typical, high gain mode), < 1e ⁻ RMS (CMS mode)
Dark Current	< 0.05 e ⁻ /p/s (typical)
Cooling Method	Thermoelectric with liquid circulation (requires external chiller)
Cooling Temperature	< -25 °C (guaranteed)
Data Interfaces	CoaXPress® (Teledyne PCIe frame grabber card included)
Bit depth	14-, 16-, and 18-bit
Readout Modes	Rolling and true global shutter
Max Exposure Time	> 1 hour
Window Material	JGS1 UV grade quartz glass; broadband AR coatings standard
Operating Temperature Range	-30°C to 30°C; relative humidity: ≤ 90% (non-condensing); altitude: 0-4500 meters
Camera Weight	21.4 kg
Camera Dimensions	26.2 x 26.2 x 32.8 cm (W x H x L)
Nonlinearity	< 1%
Binning	2 x 2 and 4 x 4 (on FPGA)
I/O signals	Three MCX connectors: 2x software configurable outputs, 1x trigger input
Certification	CE

COSMOS-6k QE CURVE

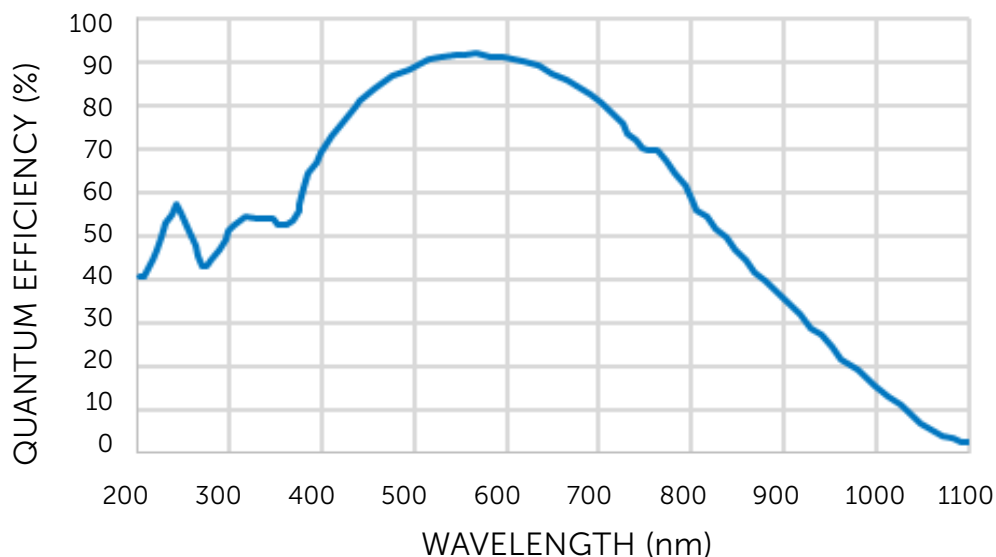

COSMOS-6k READOUT MODES AND PROPERTIES


HDR: High Dynamic Range Mode; CMS: Correlated Multisampling

Data	Gain Setting	Shutter Mode	Read Noise (e ⁻)	Frame Rate (fps)
16 bit	High – CMS 8x	Rolling	< 1	1.0
14 bit	High	Rolling	1.4	22
14 bit	High	Global	2	22
16 bit	Low	Rolling	6	9.7
16 bit	Low	Global	11	7.7
18 bit	HDR	Rolling	1.5	3.6

COSMOS-6k SPEED TABLE

Frame Rates (frames per second)

Region of interest size (pixels)	14-bit (rolling shutter and global shutter)	16-bit (rolling shutter – CMS)	16-bit (rolling shutter)	14-bit (global shutter)	16-bit (global shutter)	18 bit (HDR)
6504 x 6500	22	1.0	9.7	22	7.7	3.6
6504 x 4096	36	1.6	15	36	12	5.7
6504 x 2048	72	3.2	30	72	24	11
6504 x 1600	92	4.1	39	92	31	14
6504 x 1024	144	6.4	61	144	48	22
6504 x 512	288	12	120	288	96	45
6504 x 256	572	24	233	567	189	88

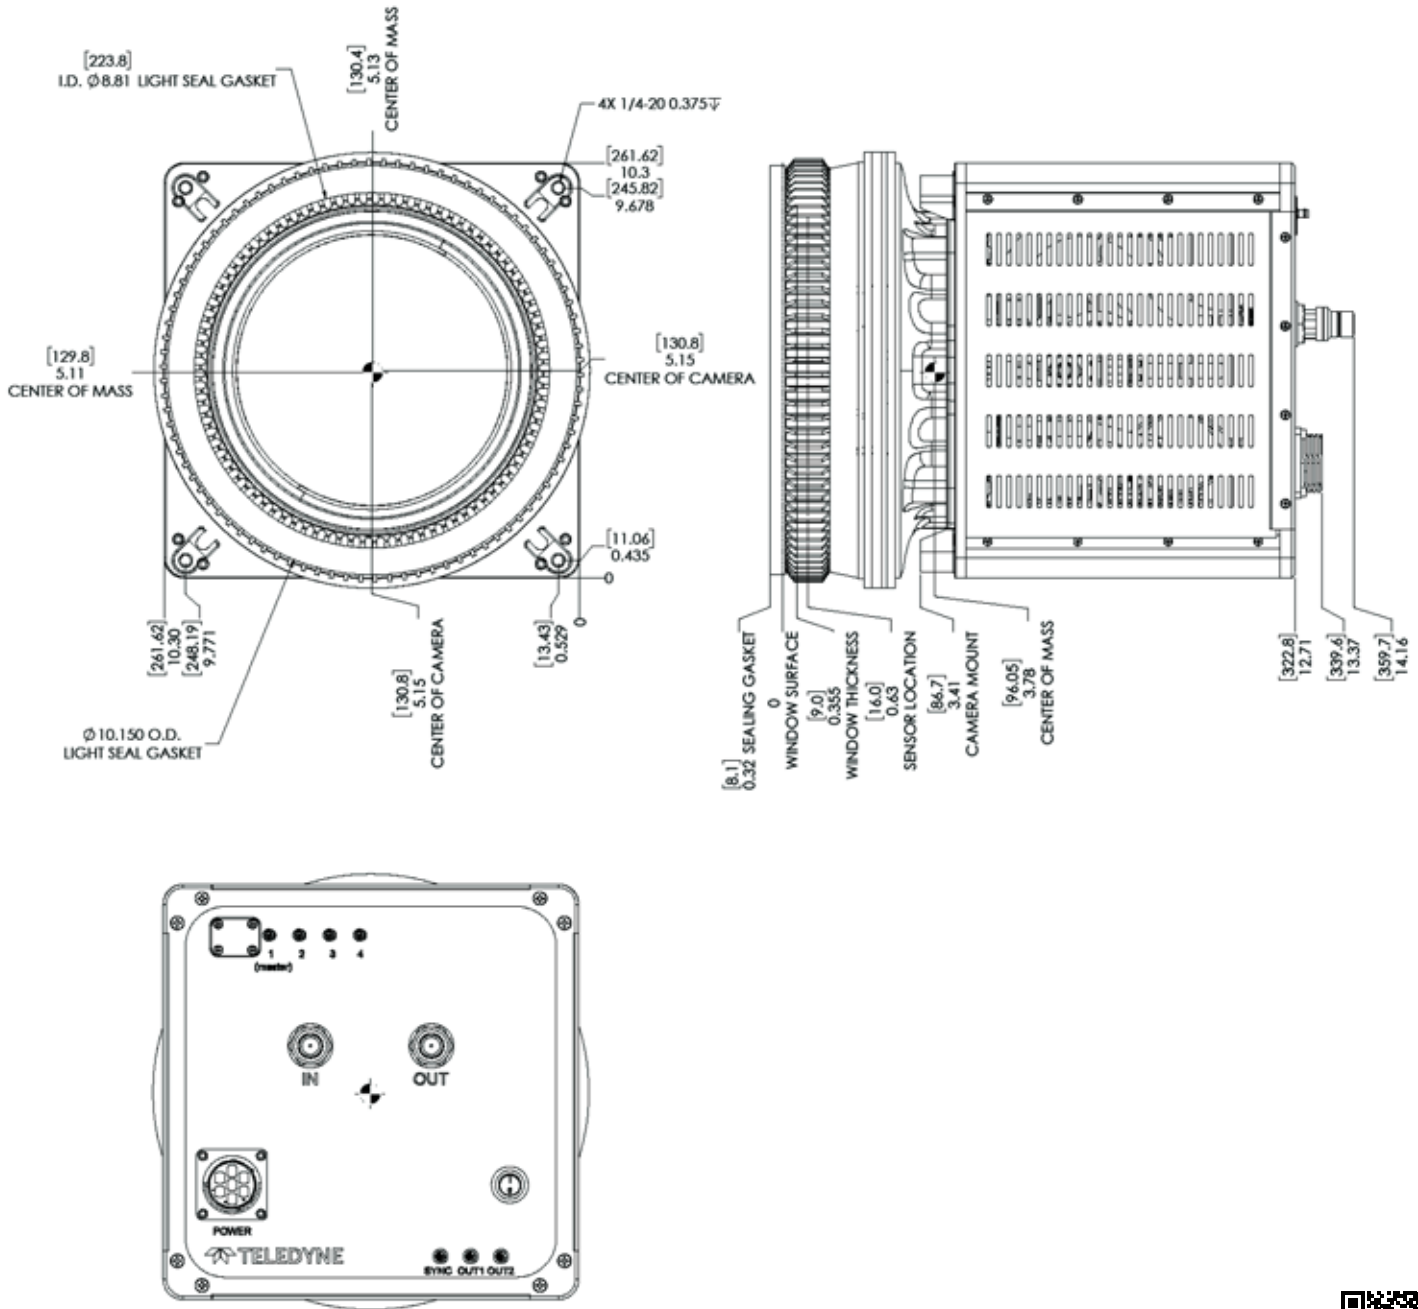DIMENSIONAL OUTLINES (Unit: mm)

FOR MORE INFORMATION CONTACT:

AMERICAS Trenton, New Jersey, USA | +1 609-587-9797 | pi.info@teledyne.com
 EUROPE France | +33 (0)1 70 38 19 00 | evr@teledyne.com
 Germany | +49 (0)89 660 779 30 | pi.germany@teledyne.com
 United Kingdom | +44 (0) 7810 835 719 | pi.info@teledyne.com
 ASIA PACIFIC China | +86 157 2153 5343 | pi.info.china@teledyne.com
 Japan | +81 3 6709 0631 | pi.nippon@teledyne.com

Specifications in this datasheet are subject to change.
 Refer to the Teledyne Space Imaging website for most current specifications.

Copyright © 2025 Teledyne Digital Imaging US, Inc. dba Teledyne Princeton Instruments
 All rights reserved.

Revision Date: 2025 03 25